

Lightology

lightology.com
866-954-4489
04-21-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE892165**
 Approved On: _____ Approved By: _____

Entra 3IN SQ Adjustable IC New Construction Housing By Visual Comfort Architectural



Description

Entra is easy to configure with a complete feature set that offers flexibility without an overwhelming list of options. The 3 Inch Square Adjustable Downlight and Wall Wash IC New Construction Housing is offered with high (18 watt) or low (12 watt) output, four color temperature and Warm Dim (3000K - 1800K) options, and 20-40-65 degree interchangeable optics with hot aiming (30 degree tilt, 359 degree rotation). LED module ships with 40 degree optic installed. Adjust to 30 degree tilt for wall wash applications. 4 inch cut out. Dimmable with a Triac, electronic low voltage (ELV) or 0-10V dimmer, sold separately. ETL listed. Energy Star. Suitable for damp locations. Can be used to comply with CEC 2016 Title 24 Part 6. A complete fixture includes a housing and trim (with or without flange), sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.2"W x 3.5"H x 7.2"D
INTEGRATED LED MODULE	1 x LED/12W/120-277V LED

Technical Information

APERTURE SIZE	3.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	3.5"
HOUSING TYPE	New construction IC Airtight
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	65°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	81.67
LUMINOUS FLUX	980 lumens



Shown in black

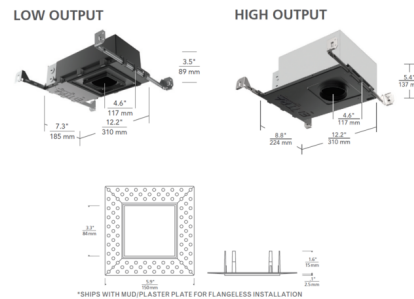

CLICK TO VIEW PRODUCT

Notes: