



### BRAND

WAC Lighting

### DESCRIPTION

The Oculux 1 Inch Square Downlight with Adjustable Trim and LED light engine is an architectural grade IC-Rated New Construction or Remodel all-in-one unit. May be reconfigured in the field for remodel. Trim available in powder coat White or electroplated Brushed Nickel finish. Single spot light source with 0-20 degree adjustability and 35 degree visual cutoff. Offered in 2700K or 3000K color temperature with 25 or 45 degree beam angle. Ceiling thickness: .50 to 1 inch. Cutout: 2.5 inch. ETL listed. Suitable for damp locations. Energy Star. Title 24/JA8 compliant. Dimmable with a Triac or electronic low voltage (ELV) dimmer, sold separately.




Shown in: Brushed Nickel

TRIM COLOR	N/A
BODY FINISH	Brushed Nickel
WATTAGE	8W
DIMMER	Low Voltage Electronic
DIMENSIONS	9.5"W x 4"H x 8.56"D
INTEGRATED LED MODULE	
LAMP	1 x LED/8W/120V LED

#### Technical Information

LUMINOUS FLUX	680 lumens
LUMENS/WATT	85.00
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	25°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	4"
SPEC #	WAC895856

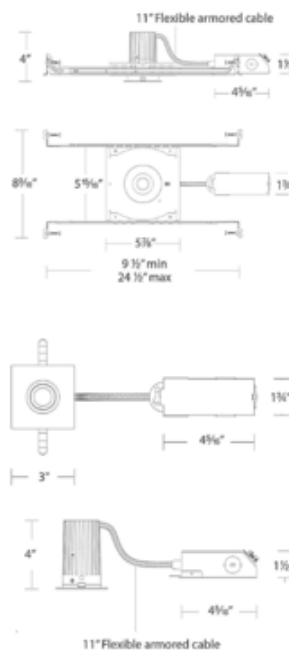

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE