

Lightology

lightology.com
866-954-4489
06-21-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE969919**
 Approved On: _____ Approved By: _____

Entra CL 3IN Square Flangeless New Construction Housing By Visual Comfort Architectural



Description

This Entra CL new construction housing is designed for use with an Entra CL 3 inch square flangeless trim. The housing includes a Universal 120-277V driver, dimmable by standard reverse-phase, forward-phase, TRIAC, or 0-10V dimming (down to 5%). 277V is only compatible with 0-10V dimming. Damp-rated when used with an adjustable trim, wet-rated when used with a fixed downlight or wall wash trim. Notes: A complete fixture requires this housing and a trim, sold separately. The light module is included with the trim. The 15W housing is not compatible with a warm dim trim.

Specifications


| | |
|------------------------|--------------------------|
| REFLECTOR/BAFFLE COLOR | N/A |
| BODY FINISH | Galvanized Steel |
| WATTAGE | 12W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 12.1"W x 3.5"H x 8.8"D |
| BULB NOT INCLUDED | 1 x LED/12W/120-277V LED |

Technical Information

| | |
|----------------|------------------------------|
| APERTURE SHAPE | Square |
| HOUSING HEIGHT | 3.5" |
| HOUSING TYPE | New construction IC Airtight |
| CEILING TYPE | Drywall Trimless/Flush |
| LUMENS/WATT | 91.67 |
| LUMINOUS FLUX | 1100 lumens |



Shown in galvanized steel

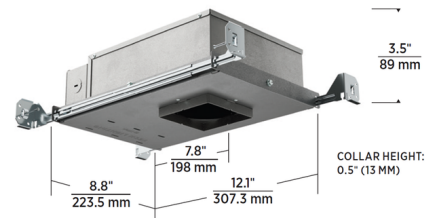

CLICK TO VIEW PRODUCT

Notes: