



BRAND

PureEdge Lighting

DESCRIPTION

Lazer Line is a 24VDC direct or indirect (uplight or downlight) LED lighting system providing general illumination for architectural applications. The field-cutttable single channel in 3 and 5 watts per foot is sold in 1 inch increments and allows a maximum length of 30 feet (3 watt) or 20 feet (5 watt) with power feed at one end and one non-power turnbuckle, or a maximum length of 60 feet (3 watt) or 40 feet (5 watt) with power feed turnbuckles at both ends. The 4 inch round turnbuckles allow Lazer Line to be positioned 0-90 degrees relative to the mounting surface, creating a 3-dimensional appearance. Mounts to standard 4 inch square junction box with round plaster ring. Paint canopy to blend into wall for a seamless look. Note: System includes Lazer Line channel and mounting hardware. System requires a Universal remote power supply (dimmmable TRIAC/ELV/0-10V), sold separately. Product is built to order.




SHADE COLOR	White
BODY FINISH	Satin Aluminum
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.44"W
INTEGRATED LED MODULE	
LAMP	5 x LED/3W/24V LED

Technical Information

LUMINOUS FLUX	1200 lumens
LUMENS/WATT	400.00
LAMP COLOR	2400K
COLOR RENDERING	91 CRI
BEAM ANGLE	120°

SPEC # EDG972948

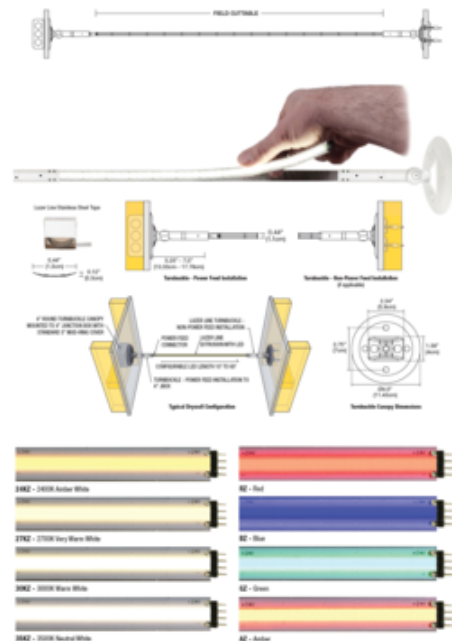

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE